WORLD INTELLECTUAL PROPERTY ORGANIZATION International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 5:

A61B 19/00

(11)

(11) International Publication Number:

WO 93/09727

A1 |

(43) International Publication Date:

27 May 1993 (27.05.93)

(21) International Application Number:

PCT/US92/09649

(22) International Filing Date:

12 November 1992 (12.11.92)

(30) Priority data:

792,001

14 November 1991 (14.11.91) US

(60) Parent Application or Grant

(63) Related by Continuation US

792,001 (CON)

Filed on

14 November 1991 (14.11.91)

(71) Applicant (for all designated States except US): WAKE FOR-EST UNIVERSITY [US/US]; Office of Research Development, 300 South Hawthorne Road, Winston-Salem, NC 27103 (US). (72) Inventors; and

(75) Inventors/Applicants (for US only): ARGENTA, Louis, C. [US/US]; 525 Knob View Drive, Winston-Salem, NC 27104 (US). MORYKWAS, Michael, J. [US/US]; 6147 Spring Forest Drive, Pfafftown, NC 27040 (US).


(74) Agents: SIBLEY, Kenneth, D. et al.; Bell, Seltzer, Park & Gibson, P.O. Drawer 34009, Charlotte, NC 28234 (US).

(81) Designated States: AT, AU, BB, BG, BR, CA, CH, CS, DE, DK, ES, FI, GB, HU, JP, KP, KR, LK, LU, MG, MN, MW, NL, NO, PL, RO, RU, SD, SE, UA, US, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, SN, TD, TG).

Published

With international search report.

(54) Title: METHOD AND APPARATUS FOR TREATING TISSUE DAMAGE

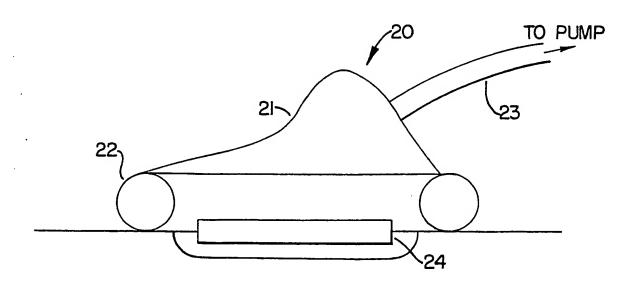

(57) Abstract

: in

The invention disclosed is a method of treating tissue damage comprising applying a negative pressure to a wound sufficient in time and magnitude to promote tissue migration and thus facilitate closure of the wound. The method is applicable to wounds, burns, infected wounds, and live tissue attachments. Configurations of apparatus for carrying out the method are also disclosed **BEST AVAILABLE COPY**

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

L T	Austria	FR	France	MR MW	Mauritania Malawi
AU	Australia	GA	Gabon		Netherlands
3B	Barhados	GB	United Kingdom	NL	Norway
3E	Belgium	GN	Guinea	NO	New Zealand
3F	Burkina Faso	GR	Greece	NZ	Poland
3G	Bulgaria	HU	Hungary	PL	
3.3	Benin	ΙE	freland	PT	Portugal Romania
3R	Brazil	IT	Italy	RO	Russian Federation
CA	Canada	JP	Japan	RU	Sudan
F	Central African Republic	KP	Democratic People's Republic	SD	
CG	Congo	•	of Korea	SE	Sweden Slovak Republic
CH	Switzerland	KR	Republic of Korea	SK	
ZL	Côte d'Ivoire	KZ	Kazakhstan	SN	Senegal Soviet Union
M	Cameroon	1.1	Liechtenstein	su	_
25	Czechoslovakia -	LK	Sri Lanka	TD	Chad
Z	Czech Republic	1.U	Laixembourg	TG	Togo
DE .	Germany	MC	Монасо	UA	Ukraine United States of America
OK .	Denmark	MC	Madagascar	บร	
ES	Spain	MI.	Mali	VN	Viet Nam
FI	Finland	MN-	Mongolia		

エレエノ しごうん/ ロクロマク

5

10

15

20

METHOD AND APPARATUS FOR TREATING TISSUE DAMAGE

Field of the Invention

This invention relates generally to wound healing, and more specifically is directed at wounds that are unlikely to heal completely under conventional methods.

Background of the Invention

The treatment of open wounds that are too large to spontaneously close has been a troublesome area for many years. Wound closure requires that epithelial and subcutaneous tissue adjacent to the wound migrate toward and eventually close the wound. Some wounds are sufficiently large or infected that they are unable to In such instances, a zone of close spontaneously. stasis, an area in which localized swelling of tissues restricts the flow of blood to these tissues, forms near the surface of the wound. Without sufficient blood flow, the wound is unable to successfully fight bacterial to accordingly is unable infection and spontaneously.

The most common technique for closure of open wounds has long been the use of sutures or staples. These mechanical closure methods provide tension on the skin tissue at the wound border that encourages

WO 93/09727 -2-

5

10

15

20

25

epithelial tissue to migrate toward the wound and cover While suturing and stapling of wounds is widely practiced, it has a major drawback: the tensile force required to achieve closure with sutures or staples causes very high localized stresses at the suture insertion points, resulting in the rupture of the tissue Substantial rupture will eventually at these points. cause dehiscence in some wounds, which results additional tissue loss. Moreover, some infected wounds harden and inflame to such a degree that closure by Wounds not reparable by suturing is not feasible. stapling generally require prolonged suturing or hospitalization, with its attendant high costs, and major surgical procedures, such as grafts of surrounding Examples of such wounds include large, deep, open wounds, pressure sores resulting from prolonged pressure, ulcers resulting from chronic osteomyelitis, and partial thickness burns that subsequently develop into full thickness burns.

į

To date, there has been no consistently satisfactory method for treating such wounds. What is needed is a method of closing the wound without the localized stresses that accompany suturing while at the same time treating any infection present in the wound along with a simple apparatus to carry out the method. Such a method and apparatus would reduce hospitalization and increase the probability of wound closure.

Summary of the Invention

A first aspect of the invention is a method of treating tissue damage which comprises applying a negative pressure to a wound over an area sufficient to promote the migration of epithelial and subcutaneous tissue toward the wound and for a time period sufficient to facilitate closure of the wound. The method is particularly useful for treating pressure sores.

WU 33/03/4/ rc1/ 0374/ 07047

Î

5

10

15

20

25

30

35

A second aspect of the invention is a method of treating a burn wound which comprises applying a negative pressure to the burn over an area and for a time sufficient to inhibit progression in the depth of the burn. The method is preferably used on a partial thickness burn soon after its infliction.

-3-

A third aspect of the invention is a method of treating tissue damage which comprises applying a negative pressure to a wound for a time sufficient to reduce bacterial density in a wound. A preferred use of this method is its application to a wound for at least 3 days to reduce the bacterial density of an infected wound to the point at which surgical closure can be attempted.

A fourth aspect of the invention is a method of enhancing the attachment of adjacent tissue to a wound which comprises applying a negative pressure to a joined complex of wound and adjacent living tissue at a sufficient magnitude and for a sufficient time to promote the migration of epithelial and subcutaneous tissue toward the complex. A preferred use of this method is enhanced attachment of adjacent tissue to tissues of the wound edges. Another use is enhanced attachment of an open skin graft.

A fifth aspect of the invention is an apparatus for facilitating the healing of wounds which comprises vacuum means for creating a negative pressure on the area sealing the wound, tissue surrounding operatively associated with the vacuum means to maintain the negative pressure on the wound, and screen means for preventing overgrowth of tissue in the wound area. preferred embodiment of the invention comprises a section of open-cell foam configured to be placed over a wound, a flexible tube inserted into the foam section for attachment to a suction pump, and a flexible polymer and tubing foam section overlying the configured to be adhered to the skin surrounding the wound.

WO 93/09727

5

10

15

20

25

30

35

Brief Description of the Drawings

rigure 1 shows a cross-sectional view of a negative pressure device comprising a open-cell polymer screen, a flexible hose connecting the foam section to a suction pump, and a flexible polymer sheet overlying the foam-hose assembly to provide the necessary seal; and

Figure 2 shows a cross-sectional view of a negative pressure device comprising a porous screen, an inflatible cuff attached to a semi-rigid cup, and a flexible hose extending from a suction pump to a point within the sealed volume of the cup-cuff assembly.

Detailed Description of the Invention

The present invention includes a method of treating tissue damage which comprises the stages of applying a negative pressure to a wound over an area sufficient to promote migration of epithelial subcutaneous tissue toward the wound, with the negative pressure being maintained for a time sufficient to facilitate closure of the wound. Wound closure requires that epithelial and subcutaneous tissue migrate from the The use of negative wound border toward the wound. pressure provides tension on this border tissue that causes accelerated tissue migration. It has been observed that the use of the method also causes within the wound increased formation of granulation tissue, a matrix of collagen, fibronectin, and hyaluronic acid carrying macrophages, fibroblasts, and neovasculature that aids in healing.

The method is particularly suited for use on pressure sores. A pressure sore is a wound that develops due to constant compressive pressure on the skin surface and underlying tissue. Blood flow to the compressed tissue is restricted to the extent that the overlying tissue dies and subsequently allows the underlying tissue

よくすし ロコンヤノ ロンロチン

5

10

15

20

25

30

35

The decrease of blood flow to the to become infected. wound prevents a normal immune reaction to fight the presence of which prevents tissue infection, the Pressure sores often migration from the wound border. occur on bedridden patients who are unable to feel the sore or to move sufficiently to relieve the contact pressure. Such wounds can become very serious, requiring extensive and repeated skin grafts; some are even fatal. As described above, application of negative pressure to the sore permits migration of wound border tissue to occur and thus allows sores to heal without these more drastic procedures.

be practiced with the can The method negative continuous substantially application of pressure, where the pressure is relieved only to change the dressing on the wound, or it can be practiced with the use of a cyclic application of pressure in alternate periods of application and non-application. The ratio of duration of application period to non-application period can be as low as 1:10 or as high as 10:1, but is most A preferred pattern is 5 minutes of preferably 1:1. pressure application followed by 5 minutes of relief.

The method is preferably practiced using a negative pressure ranging from 0.01 to 0.99 atmospheres, and more preferably practiced using a negative pressure ranging between 0.5 to 0.8 atmospheres. The time period for use of the method on a wound is preferably at least 12 hours, but can be, for example, 1 day, 2 days, 5 days, 7 days, 14 days, 30 days, or even longer. There is no upper limit beyond which use of the method is no longer beneficial; the method increases the rate of closure up to the time the wound actually closes.

The present invention also includes a method of treating damaged tissue which comprises the steps of applying a negative pressure to a wound for a time and at a magnitude sufficient to reduce bacterial density in the wound. Open wounds are almost always contaminated with

FU1/ U374/ U7U47

5

10

15

20

25

30

35

harmful bacteria. Generally a bacterial density of 105 bacterial organisms per gram of tissue is regarded as infected. (It is generally accepted that at this level of infection, grafted tissue will not adhere to a wound). These bacteria must be killed, either through the wound host's natural immune response or through some external method, before a wound will close. We have observed that application of negative pressure to a wound will reduce the bacterial density of the wound; it is believed that bacteria's either the due to is this effect incompatibility with a negative pressure environment or the increased blood flow to the wound area, as blood brings with it cells and enzymes to destroy the bacteria.

The method can be used to reduce bacterial density in a wound by at least half. More preferably, it can be used to reduce bacterial density by at least 1,000 fold. Most preferably, the method can be used to reduce bacterial density by at least 1,000,000 fold. The ranges of pressure magnitude and application duration are as described above, although Example 3 demonstrates dramatic contamination after 4-day wound reduction in Pressure can be application of negative pressure. cyclically in the or continuously applied application/nonapplication ratios described above.

The present invention also includes a method of treating a burn which comprises the steps of applying a negative pressure to the burn over an area and for a time sufficient to inhibit formation of a full thickness burn. A partial thickness burn, one which has a surface layer of dead tissue and an underlying zone of stasis, is often sufficiently infected that it will transform within 24-48 hours into a full thickness burn, one in which all epidermal structures are destroyed. As explained above, the application of a negative pressure to the wound prevents the infection from becoming sufficiently severe underlying the cause destruction of As above, the magnitude, pattern, structures.

WU 93/U9/4/

5

10

15

20

25

30

35

duration of pressure application can vary with the individual wound.

-7-

The present invention also provides a method for enhancing the attachment of living tissue to a wound which comprises the steps of first joining the living tissue to the wound to form a wound-tissue complex, then applying a negative pressure to the wound-tissue complex sufficient to promote migration area epithelial and subcutaneous tissue toward the complex, with the negative pressure being maintained for a time period sufficient to facilitate closure of the wound. Attachment of living tissue to a wound is a common procedure that can take many forms. For example, one common technique is the use of a "flap", a technique in which skin tissue from an area adjacent to the wound is detached on three sides but remains attached on the fourth, then is moved onto the wound. Another frequently used technique is an open skin graft in which skin is fully detached from another skin surface and grafted onto The application of negative pressure to the the wound. wound-graft complex reduces bacterial density in the complex and improves blood flow to the wound, thereby improving the attachment of the grafted tissue.

The acceptable ranges of time, magnitude, and application/non-application ratio are as described above. Each of these variables is affected by the size and type of wound.

invention also includes an The present The apparatus for facilitating the healing of wounds. apparatus comprises vacuum means such as a pump for skin creating a negative pressure on the area surrounding the wound, sealing means such as an adhesive sheet operatively associated with the vacuum means for maintaining negative pressure on the wound by contacting the skin surrounding the wound, and screen means such as as open-cell foam section located within the sealing

10

15

20

25

30

35

means for preventing the overgrowth of tissue in the wound area.

The screen means is placed over substantially the expanse of the wound to prevent its overgrowth. size and configuration of the screen can be adjusted to It can be formed from a fit the individual wound. variety of porous semi-rigid materials. The material must be sufficiently porous to allow oxygen to reach the prevent sufficiently rigid to and Most preferred is the use of an open-cell overgrowth. polymer foam, which permits direct connection of the screen means to the vacuum means through a flexible hose inserted into the foam. Such foam can vary in thickness and rigidity, although it is preferred that a spongy material be used for the patient's comfort if the patient must lay upon the device during its operation. also be perforated to reduce its weight. Another honeycombed of section embodiment comprises a polyethylene sheet cut to the shape of the wound.

Possible sealing means include a flexible sealing rim contacting the skin surrounding the wound, a flexible polymer sheet overlying the screen means and the vacuum means and attached to the skin through an adhesive applied to the sheet surface facing the skin, and an inflatable sealing cuff that conforms to the skin when inflated and that is held in place by the suction of the vacuum means. If an adhesive sheet is used, it must have sufficient adhesion to remain in contact with the skin negative pressure. the seal under Additionally, it must be sufficiently flexible to overlay the screen means and still conform to the skin around the The sealing means also can include a semi-rigid cup that protects the wound from external contact. example, a suitable cup-cuff assembly is provided by an adult CPR mask with an inflatable sleeve.

Suitable vacuum means includes any suction pump capable of providing at least 0.1 pound suction to the

10

15

20

25

30

35

4

C11 US/21 U/U7/

wound, and preferably up to 3 pounds suction, and most preferably up to 14 pounds suction, and a flexible hose leads from the pump to a point within the that pressurized volume created by the sealing means. The pump can be any ordinary suction pump suitable for medical purposes that is capable of providing the The dimension of the tubing are necesary suction. limited only by the pump's ability to provide the suction level neede for operation. A 1/4 inch diameter tube has vacuum means may operate suitable. The proven substantially continuously, or may operate cyclically with alternate periods of application and nonapplication of pressure to the wound.

A preferred embodiment of the invention, shown in Figure 1, comprises a substantially flat section of open cell polyester foam section 10 (Fischer Scientific, Pittsburgh, PA 15219) sufficiently large to cover the wound and thus prevent wound overgrowth, a flexible hollow tube 11 (Fischer Scientific) inserted into the open cell foam section 10 and joined thereto with an adhesive and extending to attach at its opposite end to a Gast Vacuum pump (Fischer Scientific), and an Ioban adhesive sheet 12 (Minnesota Mining and Manufacturing, St. Paul, MN. 55144) overlying the foam section 10 and tubing 11 and adhered to the skin surrounding the wound, thus forming a seal that allows creation of a vacuum when the suction pump operates. Such an apparatus would most preferably be packaged in a sterile condition to ameliorate the need for sterilization of the apparatus prior to use (note that the adhesive sheet 12 could be packaged separately from the foam-tube assembly). particular advantage of this configuration is its use with pressure sores: the device can be placed in the depths of the wound and the patient can lie upon it without either affecting the utility of the device or further damaging the wound. This becomes critical if the

10

15

20

25

30

35

patient cannot be moved from this posture for other medical reasons.

The present invention is explained further in the following examples. These examples are provided for illustrative purposes only and are not to be taken as limiting.

EXAMPLE 1

í

Rate of Wound Healing under Negative Pressure

This example demonstrates the use of negative pressure to increase the rate of healing of full thickness defects by increasing vascularity and the amount of granulation tissue present.

obtained and Fifteen-kilogram pigs were The backs of the conditioned for 1 week prior to use. pigs were shaved and scrubbed for surgery. thickness circular defects were created on the midline of the animals, 2.5 cm in diameter and 1 cm thick. Alginate impressions were taken of each defect to determine its Cefazolin (Kefzol) (500 mg) was administered volume. intramuscularly (antibiotic). The suction devices used, shown in Figure 2, comprised an adult CPR mask 20 (Doug Brown and Associates, Huntington Beach, CA 92648) comprising a semi-rigid cup 21 and inflatible cuff 22 in contact with the skin, an open cell polyester screen 24 overlying the wound, and a flexible 1/4 inch diameter hose 23 (Fischer Scientific) connected by a Nalgene tubing connector to a vacuum pump (Fischer Scientific) and extending through a sealed hole in the cup. device was configured such that the suction hose ran from the cup on the animal up through a pulley suspended over the center of the pen and down to a vacuum trap bottle to collect any liquid exudate, then down to the vacuum pump. A suction device was attached over each defect, and suction (2-6 pounds vacuum) was applied to one of the so that removed only The devices were devices. impressions could be made of each defect. This

10

15

20

25

30

ń

procedure was continued until the volume of both defects was zero.

Table 1 compares the volume of defects over time on individual specimens. Table 2 shows data expressed as the amount of granulation tissue formed per day and as the percent difference in rate of granulation tissue formation. Both data sets show that in all cases the use of negative pressure increased the rate of wound closure and the formation of granulation tissue at a statistically significant rate.

EXAMPLE 2

Rate of Burn Healing under Negative Pressure

This example was designed to demonstrate the use of continuous closed suction for the treatment of deep, partial thickness thermal burns (second degree burns).

The backs of 15 kg pigs were shaved and scrubbed for surgery. A 1.5 inch diameter brass rod was heated to 190°C in an oil bath. The rod was pressed onto the pig's skin for 15 seconds following a well-known technique of relating depth of burn to time temperature. Three burns were created over the spine of each pig, separated by 5 cm intervals. Suction apparatus cups of the configuration described above were placed over two of the burns, with silver sulphadiazine (Silvadine) cream, the standard antibiotic cream applied to human burns prior to excision of burned tissue, applied to the third. Cefazolin (Kefzol) (500 mg) was administered intramuscularly (antibiotic). Suction (2-6 pounds vacuum) was applied to one of the cups. (2 mm) punch biopsy was taken of the wounded area and examined histologically for depth of burn.

Rate of granulation tissue formation for control and reduced pressure treated full thickness defects in pigs. (Day 0 = surgery) Table 1.

	D 12					
	<u>Animal Treatment Day 0 Day 1 D 2 D 3 D 4 D 5 D 6 D 7 D 8 D 9 D 10 D 11 D 12</u>			0	0	0
ume (cc)	7 D 8 D 9	1.2	00	0 1.5	0.0	0.7
Defect Volume (cc)	0 5 D 6 D		6.5 5.0	3.0	0 2.0	0 1.0
–	D 3 D 4	4.3	8.0		9.0	6.0
	Day 1 D 2			4.0		
	Day 0	5.0	9.3	2.0	7.0	6.0
	Treatment	Suction	Suction	Suction	Suction	Suction
	Animal	г	N	e	4	വ

٦,	
fu]	
treated	
pressure	
reduced	
and	
control	
for	
tion tissue formation for control and reduced pressure treated full	
tissue	in pigs.
on	ťΔ
anulatio	defects
ann	dei
f gi	thickness d
Rate of g	lick
Ra	1
a 2	
Table	

Á

	% Increase*	26.3	28.9	75.8	65.1	65.1
	Tissue/Day(cc)	0.48	1.16	0.58	0.71	0.71
thickness defects in pigs.	Granulated Treatment	Suction	Suction	Suction	Suction	Suction
rable 2.	Animal	н	7	е	4	വ

* (Suction-Control)/Control

Rate of reduction in bacterial density for control and reduce and pressure treated pigs (n=5) table 3.

Log Organisms Per Gram Tissue

4		Day 1	Day 2	Day 3	Day 4	Day 5	Day 7
earmenr	Day o					0	7 08
- Conta	Mean 8.44	8.04	8.17	7.13	7.13	20.0	, t
TO TO	SD + 38	+,13	+ 98	+,15	+.24	±1.12	30 • H
		I		7	K 7 7	3,98	4.32
cuum	Mean 7.69	7.36	7.37	7 .0	о. ш Т Ч	+3.46	+3.74
	SD +.83	+.84	1 1.40	ဂ ဂ 	o Fl	-1	1

10

15

20

25

30

F .

ſ

Biopsies were analyzed by a dermatopathologist who was not told the nature of the study. It was concluded that the suctioned tissue specimens were healthier and healing more quickly than non-suctioned specimens.

EXAMPLE 3

Reduction of Bacterial Density under Negative Pressure

This example illustrates the effects of continuous closed suction on the bacterial density of infected tissue.

Fifteen-kilogram pigs were shaved and prepared for surgery. Two 2.5 cm diameter defects were created on the dorsum of each pig using sterile technique, with a 7.5 cm interval retained between the edges of the defects. Hemostasis was obtained by electrocautery. One ml of culture broth containing 10⁸ Staph. aureus organisms was injected just beneath the surface tissue in the center of each wound. Suction cups of the configuration described above were placed over each defect, and a T-shirt was placed over the animal. Suction (2-6 pounds vacuum) was applied 24 hours after surgery to only one of the defects, allowing each animal to act as its own control. No antibiotics were given during the course of the study.

Each day, a small (3 mm biopsy punch) piece of granulation tissue was removed from the center of each defect. The number of organisms present in the tissue was determined by weighing the tissue, homogenizing the tissue, serially diluting the supernatant, and plating the diluted supernatant on blood agar plates. Samples of the original broth were treated in an identical manner to determine effects of mechanical manipulations on bacteria viability. The procedure was performed until the wounds were healed.

WO 93/09727

5

10

15

20

25

30

35

-16-

Table 3 compares the bacterial density of treated wounds and control wounds over time. The data is expressed as the mean log of the number of viable organisms per gram of tissue as a function of time. Clearly, the application of negative pressure increases the rate at which bacteria are destroyed. Using 105 organisms per gram of tissue as a baseline for infection, the data show that on average a suctioned wound was disinfected after 4 days of treatment, while the average non-treated wound was still infected after 7 days.

EXAMPLE 4

Treatment of Pressure Sore With Negative Pressure

Mr. L.J. is a 45-year-old diabetic male who has been a paraplegic as the result of a gunshot wound for 12 years. He has a history of recurrent right ischeal fossa pressure sore and right trochanteric pressure ulcer. L.J. was admitted to the hospital for treatment and closure of the pressure sores. A flap was placed onto the wound and secured with sutures and staples.

The incisions of the flap dehisced, resulting The tissues of the flap were in a large, open wound. very edematous and indurated. Nine days after the flap was detached, a negative pressure device was placed over The device comprised an open-cell polyester foam section (Fischer Scientific) approximately 1/2 inch in thickness attached to a suction pump by a flexible hose (Fischer Scientific) and covered and sealed by Ioban polymer sheet (Minnesota Mining and Manufacturing, St. A continuous vacuum of 5 psi was Paul, MN 55144). The design of the device allowed applied to the wound. the patient to lay comfortably on the device during operation.

The depth of the wound decreased dramatically. The devices were changed and the wound examined on a three times per week basis. Reduced pressure treatment

10

15

20

25

30

was continued for 6 weeks, at which time the wound was healed.

EXAMPLE 5

Treatment of Pressure Sore With Negative Pressure

Mr. W.E. is a 51-year-old male who had both legs amputated at the hip approximately 20 years ago. He was afflicted with a large pressure sore in the buttocks region. The pressure sore had been present 7 months and measured 8 inches laterally and 3 inches in its greatest width. An open cell foam reduced pressure device as described in Example 4 was placed over the wound and a negative pressure of 5 psi was applied cyclically in alternate periods of 5 minutes on, 5 minutes off. The open cell foam device was used as the patient was lying on the device. The device was changed on a three times per week schedule.

After 5 weeks of treatment, the wound measured 3 inches laterally and 1.5 inches at its greatest width. At that point the wound was essentially healthy granulation tissue that accepted a cultured keratinocyte allograft and healed completely.

EXAMPLE 6

Treatment of Wound Dehiscence With Negative Pressure

Mr. C.L. is a 50-year-old male who had undergone a colostomy revision through a midline laparotomy. He was readmitted to the hospital for wound dehiscence and evisceration following forceful coughing. The abdominal wall was closed with Prolene mesh coverage. Six weeks after placement of the Prolene mesh, the wound was still open and measured 28 cm by 23 cm with sparse granulation tissue grown through the Prolene mesh. A large reduced pressure cup device of the type described in Example 1 with an underlying porous Aquaplast sheet

-18-

(WFR/Aquaplast Corp., Wyckoff, NJ 07481) was placed on the Prolene mesh/wound surface and the space closed with a tent of Ioban. Five psi of continuous negative pressure was applied. The device was changed three times per week.

After 6 days, granulation tissue had grown through the Prolene mesh, totally covering the mesh. The patient was taken to the operating room where the surrounding tissue was undermined and grafted onto the wound to partially close the defect. Split thickness skin grafts were used to cover the remainder of the defect, and were placed on the bed of granulation tissue. The wound accepted 80 % of the grafts, and the remaining areas closed with dressing changes alone.

15 EXAMPLE 7

5

10

20

25

30

Treatment of Ankle Osteomyelitic Ulcer With Negative Pressure

Mr. R.F. is a 39-year-old white male who had severe trauma to his left lower extremity secondary to a motor vehicle accident 10 years ago. He had contracted chronic osteomyelitis and an open ulcer with exposed bone of his left lateral ankle (lateral malleolar ulcer). Necrotic soft tissue and bone were surgically removed The patient was placed on a 2-1/2 week from the ankle. course of antibiotics. The day after surgery, a reduced pressure device of the type described in Example 1 was placed over the wound, and a negative pressure of 5 psi was applied. The device was changed on a three times per week schedule. After 14 days of treatment, the wound was smaller and filled with granulation tissue. thickness skin graft was placed over the center of the defect and healed primarily.

10

15

20

EXAMPLE 8

Treatment of Burn With Negative Pressure

Patient B. is admitted with second and third degree burns over the face and upper extremities, including both hands, as a result of a house fire. large mitten-shaped reduced pressure device of the type described in Example 4 is placed over the patient's right hand, with open cell foam inserts placed between the fingers to apply reduced pressure to the interdigit Three pounds of vacuum is applied cyclically in spaces. a pattern of 5 minutes on, 5 minutes off. The device is changed on a three times per week schedule. Treatment is continued until the necrotic tissue sloughs off or is excised, followed by split thickness skin placement.

The foregoing examples are illustrative of the present invention, and are not to be construed as limiting thereof. The invention is defined by the following claims, with equivalents of the claims to be included therein.

THAT WHICH IS CLAIMED IS:

1. A method of treating tissue damage which comprises the steps of:

applying a negative pressure to a wound over an area sufficient to promote migration of epithelial and subcutaneous tissue toward the wound, with said negative pressure being maintained for a time sufficient to facilitate closure of the wound.

į

:

- 2. A method according to claim 1, in which said negative pressure is maintained for a time sufficient to permit the formation of granulation tissue in the wound.
- 3. A method according to claim 1, in which said wound is a pressure sore.
- 4. A method according to claim 1, in which said negative pressure is between 0.01 and 0.99 atmospheres.
- 5. A method according to claim 1, in which said negative pressure is between 0.5 and 0.8 atmospheres.
- 6. A method according to claim 1, in which said time is at least 12 hours.
- 7. A method according to claim 1, in which said time is at least 3 days.
- 8. A method according to claim 1, in which said pressure is applied substantially continuously.
- 9. A method according to claim 1, in which said negative pressure is cyclically applied in alternate periods of application and non-application.

WU 73/07/4/

-21-

10. A method according to claim 9, in which the ratio of said period of application to said period of non-application is at least 10:1.

- 11. A method according to claim 9, in which the ratio of said period of application to said period of non-application is at least 1:1.
- 12. A method according to claim 9, in which the ratio of said period of application to said period of non-application is at least 1:10.
- 13. A method of treating a burn which comprises the steps of:

applying a negative pressure to said burn for a time sufficient to inhibit formation of a full thickness burn.

5

Ē

á

- 14. A method according to claim 13, in which said burn is a partial thickness burn.
- 15. A method according to claim 13, in which said time is at least 12 hours.
- 16. A method according to claim 13, in which said time is at least 3 days.
- 17. A method according to claim 13, in which said negative pressure is between 0.01 and 0.99 atmospheres.
- 18. A method according to claim 13, in which said negative pressure is between 0.5 and 0.8 atmospheres.

- 19. A method according to claim 13 in which said negative pressure is applied substantially continuously.
- 20. A method according to claim 13, in which said negative pressure is cyclically applied in alternate periods of application and non-application.

á

- 21. A method according to claim 20, in which the ratio of said period of application to said period of non-application is at least 10:1.
- 22. A method according to claim 20, in which the ratio of said period of application to said period of non-application is at least 1:1.
- 23. A method according to claim 20, in which the ratio of said period of application to said period of non-application is at least 1:10.
- 24. A method of treating damaged tissue which comprises the steps of:

applying a negative pressure to a wound at a magnitude and for a time sufficient to reduce bacterial density in said wound.

5

- 25. A method according to claim 24, in which said bacterial density is reduced by at least half.
- 26. A method according to claim 24, in which said bacterial density is reduced by at least 1,000 fold.
- 27. A method according to claim 24, in which said bacterial density is reduced by at least 100,000 fold.

1 11 10374/ 07047

5

10

1

- 28. A method according to claim 24, in which said negative pressure is applied for at least 12 hours.
- 29. A method according to claim 24, in which said negative pressure is cyclically applied in alternate periods of application and non-application.
- 30. A method according to claim 24, in which said negative pressure is applied at between 0.01 and 0.99 atmospheres.
- 31. A method of enhancing the attachment of living tissue to a wound which comprises the steps of:

joining said living tissue to said wound to form a wound-tissue complex, and

applying a negative pressure to said wound-tissue complex over an area sufficient to promote migration of epithelial and subcutaneous tissue toward said complex, with said negative pressure being maintained for a time period sufficient to facilitate closure of the wound.

- 32. A method according to claim 31, in which said living tissue to be attached is a skin graft.
- 33. A method according to claim 31, in which said living tissue is a flap formed from adjacent tissue.
- 34. A method according to claim 31, in which said negative pressure is applied for at least 12 hours.
- 35. A method according to claim 31, in which said negative pressure is cyclically applied in alternate periods of application and non-application.

PC1/U374/U7047

:

1

5

5

- 36. A method according to claim 31, in which said negative pressure is applied at between 0.01 and 0.99 atmospheres.
- 37. An apparatus for facilitating the healing of wounds, comprising:

vacuum means for creating a negative pressure on the area of skin including and surrounding the wound; and

sealing means operatively associated with said vacuum means for maintaining said negative pressure on said wound by contacting the skin surrounding said wound.

- 38. An apparatus according to claim 37, which further includes screen means connected to said vacuum means for preventing the overgrowth of tissue in the wound area.
- 39. An apparatus according to claim 37, in which said screen means is a structure comprised of an open-cell polymer foam.
- 40. An apparatus according to claim 37, in which said screen means is a flat, porous, semi-rigid member.
- 41. An apparatus according to claim 37, in which said sealing means includes a flexible sealing rim in contact with said skin surrounding said wound.
- 42. An apparatus according to claim 37, in which said sealing means is a flexible polymer sheet overlying said screen means and said vacuum means, said polymer sheet having adhesive on at least the surface facing the wound to attach and seal said polymer sheet to said surrounding skin.

Ð


æ


- 43. An apparatus according to claim 37, in which said sealing means includes a sealing cuff in contact with said skin surrounding the wound.
- 44. An apparatus according to claim 43, in which said sealing cuff is inflatable.
- 45. An apparatus according to claim 37 in which sealing means includes a semi-rigid cup configured to protect said wound from external contact.
- 46. An apparatus according to claim 37, in which said vacuum means includes pump means capable of providing at least 0.1 pounds suction.
- 47. An apparatus according to claim 37, in which said vacuum means includes a pump means capable of providing at least 3 pounds suction.
- 48. An apparatus according to claim 37, in which said vacuum means includes a pump means capable of providing at least 14 pounds suction.
- 49. An apparatus according to claim 37, in which said vacuum means operates continuously.
- 50. An apparatus according to claim 37, in which said vacuum means operates cyclically to provide periods of application and non-application of suction.
- 51. An apparatus for facilitating the healing of wounds comprising:

an open cell polymer foam section configured to overlie a wound; and

a flexible tube having an inlet end and an outlet end, said inlet end inserted into said open cell polymer foam section.

52. An apparatus according to claim 50, which is in an aseptic package.

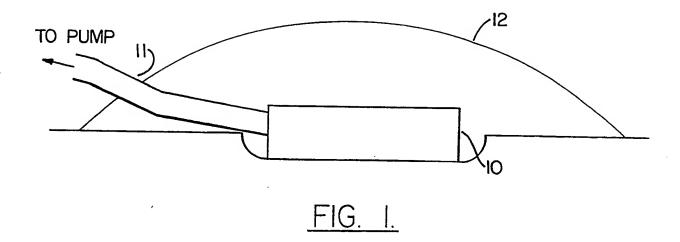

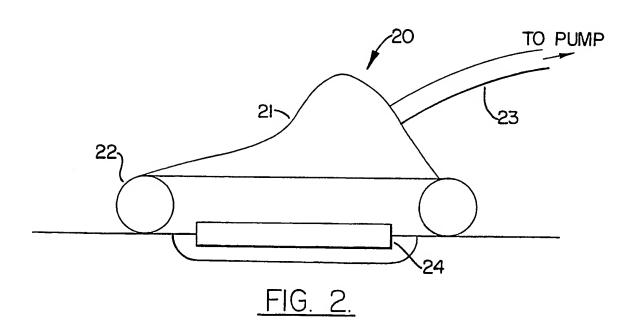

	SSIFICATION OF SUBJECT MATTER		
US CL	:A61B 19/00: :128/898		•
According to	o International Patent Classification (IPC) or to both	national classification and IPC	
	DS SEARCHED	hy classification symbols	
	ocumentation searched (classification system followed	by classification symbols,	
U.S. :	128/898 128/897-899 602/42-53		
Documentat	ion searched other than minimum documentation to the	extent that such documents are included	in the fields searched
Electronic d	lata base consulted during the international search (na	me of data base and, where practicable,	search terms used)
2.000.000			
C. DOC	UMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where ap	propriate, of the relevant passages	Relevant to claim No.
X	US,A, 3,874,387 (Barbieri) 01 Apri	1 1975 See entire document.	37,41,43
x	US,A, 4,382,441 (Svedman) 10 May	y 1983 See entire document.	51
A	US,A, 3,367,332 (Groves) 06	February 1968 See entire	1-52
	document.		,
. A	US,A, 3,026,874 (Stevens) 27 March	h 1962 See entire document.	1-52
A	US,A, 3,896,810 (Akiyama) 29 July	1975 See entire document.	1-52
X Furth	ner documents are listed in the continuation of Box C	. See patent family annex.	
•	ecial categories of cited documents:	"T" later document published after the inste date and not in conflict with the applica-	emational filing date or priority ation but cited to understand the
"A" do	cument defining the general state of the art which is not considered be part of particular relevance	principle or theory underlying the inv	ention
	rlier document published on or after the international filing date	"X" document of particular relevance; the considered novel or cannot be considered when the document is taken alone	red to involve an inventive step
cit	cument which may throw doubts on priority claim(s) or which is ed to establish the publication date of another citation or other	"V" document of particular relevance: th	e claimed invention cannot be
•	document of particular relevance; the special reason (as specified) considered to involve an inventive combined with one or more other such combined with one		h documents, such combination
"P" do	cument published prior to the international filing date but later than priority date claimed	"&" document member of the same patent	
	actual completion of the international search	Date of mailing of the international sea	arch report
28 DECE	MBER 1992	35 -	
Name and r	nailing address of the ISA/ oner of Patents and Trademarks	Authorized officer	Dance
Box PCT	n, D.C. 20231	JOHN LACYK	W Z
-	NOT APPLICABLE	Telephone No. (703) 308-0858	

Facsimile No. NOT APPLICABLE

PCT/US92/09649

	tion). DOCUMENTS CONSIDERED TO BE RELEVANT Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No
Category*		
A	US,A, 3,954,105 (Nordby et al.) 04 May 1976 See entire document.	1-52
A	US,A, 4,112,947 (Nehring) 12 September 1978 See entire document.	1-52
A	4,224,945 (Cohen) 30 September 1980 See entire document.	1-52
A	US,A, 4,250,882 (Adair) 17 February 1981 See entire document.	1-52
A	US,A, 4,834,110 (Richard) 30 May 1989 See entire document.	1-52
	·	
	•	<i>E</i>
		·
		·

This Page is Inserted by IFW Indexing and Scanning Operations and is not part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☐ BLACK BORDERS
☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
FADED TEXT OR DRAWING
☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
☐ SKEWED/SLANTED IMAGES
☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
GRAY SCALE DOCUMENTS
☐ LINES OR MARKS ON ORIGINAL DOCUMENT
☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
Потнер.

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.